




Mechanical Dimensions

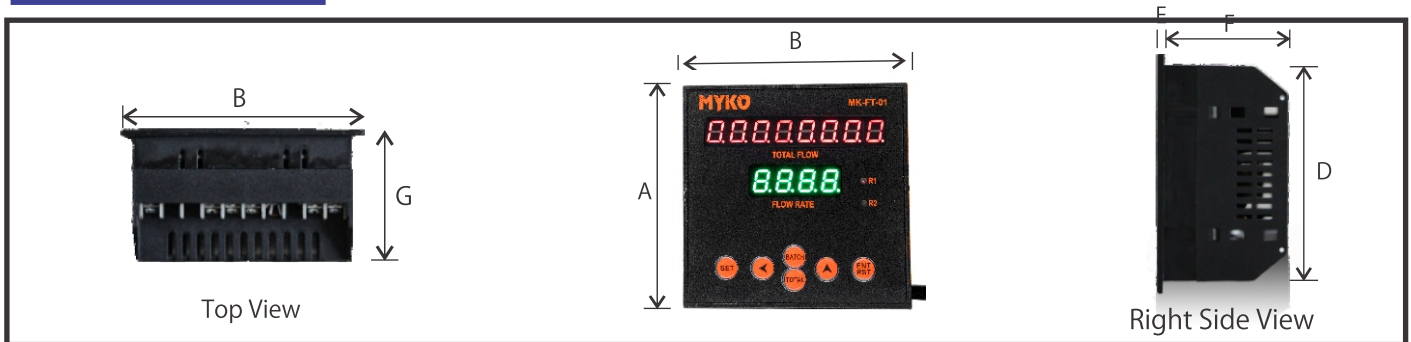

MODEL	A	B	C	D	E	F	G
DIMENSIONS	96mm	96mm	92mm	92mm	3mm	53mm	56mm

Technical Specification

Model	MK-FT01
Display	Upper:- 8 Digit 7 seg 0.4" , with Total flow Lower:- 4 Digit 7 seg 0.4" , with flow rate
Size (mm)	96 (H) x 96 (W) x 50 (D) mm
Panel Cutout	92 x 92 mm
Range	0 To 99999999 Total flow (DP selectable) 0 To 9999 flow rate (DP selectable)
Input	Proximity NPN/PNP & Input pulse, 5V DC, 12V DC, 24V DC Proxi supply 12V DC, 4 - 20mA
Output-1	1 Relay 1C/O (on total flow/flow rate selectable)
Output-2	24V DC Transmitter power supply, 30mA DC
Reset	Reset at front & back
Memory	Non Volatile
Protection Level	IP-65 (Front side) AS per IS/IEC 60529 : 2001
Power Supply	100 to 250V AC, 50/60 Hz, Approx 5VA
Operating Temperature	0°C To 55°C
Relative Humidity	Up to 95% RH Non Condensing